

# Amana® Commercial

Project #: \_\_\_\_\_

Item #: \_\_\_\_\_



Model RCS10TS shown

## Medium Volume

This category of microwave is ideal for...

### Applications:

- Pizza restaurants
- Casual dining
- Clubs
- Deli

### Defrost:

- Defrosts most frozen food products



All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621.

## Medium Volume

### Amana Commercial Microwave Model RCS10TS

#### Power Output

- 1000 watts of power.
- Five power levels for consistent, delicious results for frozen, refrigerated and fresh foods - from the freezer to table in minutes.

#### Easy to Use

- Up to 100 programmable menu items simplifies cooking and ensures consistent results.
- Four stage cooking option for easy one-touch cooking.
- Multiple quantity pad calculates the proper cooking times for multiple portions.
- User friendly touch controls are easy to use.
- Time entry option for added flexibility.
- Digital display with countdown timer for simple operation and "at-a-glance" monitoring.
- Braille touch pads are ADA compliant.
- See-through door and lighted interior for monitoring without opening the door.
- 1.2 cubic ft. (.034m<sup>3</sup>) capacity accommodates a 14" (356 mm) platter, prepackaged foods and single servings.
- Stackable to save valuable counter space.

#### Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and a professional look.
- Non-removable air filter protects oven components.
- Constructed to withstand the foodservice environment.
- Limited 3 year warranty.
- Backed by the ACP, Inc. 24/7 ComServ Support Center, 866-426-2621.
- UL and ETL Listed.




A/A File #:


Specification #:



# Amana Commercial Microwave Model RCS10TS | Medium Volume

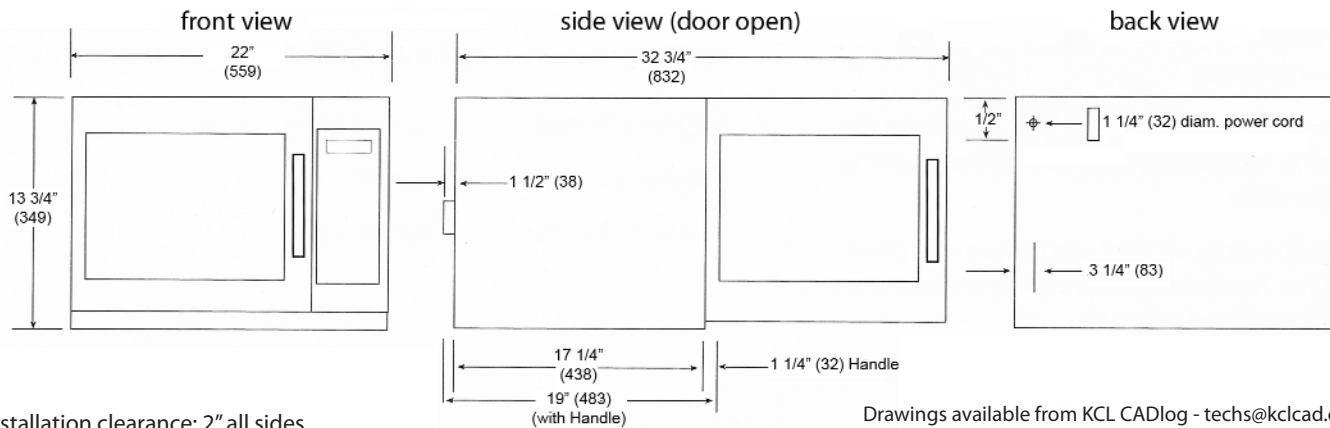

## Specifications

Model	RCS10TS	UPC Code 728028020724
Configuration	Countertop	
Control System	Touch	
Programmable Control	10	
Settings Programmable	100	
Max. Cooking Time	60:00	
Power Levels	5	
Defrost	Yes	
Time Entry Option	Yes	
Microwave Distribution	Rotating antenna, top	
Magnetron(s)	1	
Display	LED	
Stackable	Yes	
Stage Cooking	Yes, 4	
Interior Light	Yes	
Door Handle	Grab & Go	
Signal	End of cycle, adjustable	
Air Filter	Non-removable with cleaning reminder	
Multiple Portion Setting	Yes, X2	
Exterior Dimensions	H 13 3/4" (349.25) W 22" (558.8) D*19" (482.6)	
Cavity Dimensions	H 8 1/2" (216) W 14 1/2" (368.3) D 15" (381)	
Door Depth	34" (864mm), 90°+ door open	
Usable Cavity Space	1.2 cubic ft. (.034 m <sup>3</sup> )	
Exterior Finish	Stainless steel	
Interior Finish	Stainless steel	
Power Consumption	1550 W, 13 A	
Power Output**	1000 W** Microwave	
Power Source	120V, 60 Hz, 15 A single phase	
Plug Configuration / Cord	NEMA 5-15	5 ft. (1.5m) 
Frequency	2450 MHz	
Product Weight	41 lbs. (18.6 kg.)	
Ship weight (approx.)	48 lbs. (21.8 kg.)	
UPS Shippable	Yes	
Shipping Carton Size	H 17" (431.8) W 26" (660.4) D 20" (508)	

Measurements in ( ) are millimeters

\* Includes handle

\*\* IEC 705 Tested

## Specifications

Commercial microwave 10 touch pad control panel shall be programmable with the ability to program up to 100 menu items with two multiple portions. Touch pad shall include Braille for ADA compliance. Cooking timer shall be 60 minute, countdown style with a time entry option and an adjustable end of cycle audible signal. LED display shall be a backlight. There shall be 5 power levels, including defrost and 4 cooking stages. Microwave output shall be 1000 watts distributed by one magnetron with a rotating top antenna to provide superior even heating throughout the cavity. Durable door shall have a tempered glass window and a grab and go handle with a 90°+ opening for easy access. An interior light shall facilitate monitoring without opening the door. The large 1.2 cubic ft. (.034 m<sup>3</sup>) cavity shall accommodate a 14" (356 mm) platter. Interior ceramic shelf shall be sealed and recessed on oven bottom to reduce plate-to-shelf edge impact. Oven shall have a stainless steel interior and exterior and be stackable to save counter and shelf space. Front air filter shall be permanently affixed to the front off the oven and have a clean filter reminder. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services, UL for safety and ETL for sanitation.



## Warranty

Limited 3 year warranty:

Year 1 - parts, labor, and travel are covered.

Years 2 - 3 - magnetron tube (part only) is covered.

## Service

All products are backed by the ACP, Inc. 24/7 ComServ Support Center.



Specification #:

AIA File #:

