

HOSHIZAKI

Series

F1001M_H
Item # 13108 4/04


F-1001M_H SERIES

SLIM-LINE MODULAR FLAKER




F-1001MAH Flaker
Shown on Optional
B-700 Bin


F-1001MAH
Air-Cooled
F-1001MWH
Water-Cooled
F-1001MRH
Remote Air-Cooled




B-300




B-500



B-700




B-800



B-900

ICEMAKER DIMENSION	
Width x Depth x Height	
F-1001M_H	22 x 27 ³ / ₈ x 25 ¹⁵ / ₁₆ "
DIMENSION BY BIN SIZE	
Width x Depth x Height	
B-300	22 x 32 ¹ / ₂ x 71 ¹⁵ / ₁₆ "
B-500	30 x 32 ¹ / ₂ x 71 ¹⁵ / ₁₆ "
B-700	44 x 32 ¹ / ₂ x 71 ¹⁵ / ₁₆ "
B-800	48 x 32 ¹ / ₂ x 71 ¹⁵ / ₁₆ "
B-900	52 x 32 ¹ / ₂ x 71 ¹⁵ / ₁₆ "

- Durable stainless steel exterior
- Up to 970 lbs. of ice production per 24 hours
- CleanCycle12® system 
- 15 minute flush cycle every 12 hours
- Removes sediment
- Cleaner ice
- Longer life and easy maintenance

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

1-800-438-6087

FAX 1-800-345-1325

TEL 770-487-2331

www.hoshizaki.com



Reliability is a beautiful thing™

SLIM-LINE MODULAR FLAKER



- F-1001MAH** (AIR-COOLED)
- F-1001MWH** (WATER-COOLED)
- F-1001MRH** (REMOTE AIR-COOLED)

■ Up to 970 lbs. of ice production per 24 hours

**STAINLESS STEEL
INTERNAL AUGER
R-404 REFRIGERANT**

SERVICE
Panels easily removed and all components accessible for service.
Removable/cleanable air filters.

WARRANTY

TWO YEAR - Parts & Labor on entire machine.
FIVE YEAR - Parts on: Compressor, Air-Cooled Condenser Coil.

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories.
Contact Factory for Warranty in other Countries.

STORAGE BINS

- B-300 - 300 lb. Application Capacity (260 lb. ARI-Rated Capacity Bin)
- B-500 - 500 lb. Application Capacity (360 lb. ARI-Rated Capacity Bin)
- B-700 - 700 lb. Application Capacity (550 lb. ARI-Rated Capacity Bin)
- B-800 - 800 lb. Application Capacity (600 lb. ARI-Rated Capacity Bin)
- B-900 - 900 lb. Application Capacity (660 lb. ARI-Rated Capacity Bin)
- B-1200 - 1200 lb. Application Capacity
- B-1500 - 1500 lb. Application Capacity

OPERATING LIMITS

Ambient Temp Range 45 - 100°F
Water Temp Range 45 - 90°F
Voltage Range 187-253V
Water Pressure 10 - 113 psig

ELECTRICAL & PLUMBING

208-230V/60/1 (3 wire with dedicated neutral for 115V)
3/8" OD copper or equivalent independent potable water supply
3/4" independent drain connection

Clean Cycle 12®: 15 minute flush cycle every 12 hours to ensure bearings longer life

AIR - COOLED

Water Temp ° F.		50°	70°	90°
Air Temp ° F.	70°	970	930	890
	80°	855	820	785
	90°	755	740	695

WATER - COOLED

Water Temp ° F.		50°	70°	90°
Air Temp ° F.	70°	890	855	840
	80°	820	805	785
	90°	770	755	735

REMOTE AIR - COOLED

Water Temp ° F.		50°	70°	90°
Air Temp ° F.	70°	930	895	865
	80°	835	805	780
	90°	750	745	700

UTILITY CONSUMPTION

Model Number	Approximate Electrical		KWH per 100 lbs.		Condenser Water (gal./100 lbs.)	
	90/70	70/50	90/70	70/50	90/70	70/50
F-1001MAH	1755W	1530W	5.7	3.8	NA	NA
F-1001MWH	1248W	1245W	4.1	3.1	63	34
F-1001MRH	1520W	1570W	4.9	4.1	NA	NA



SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
F-1001MAH	Air-Cooled	8.1	15	210 lbs.
F-1001MWH	Water-Cooled	7.2	15	210 lbs.
F-1001MRH	Remote Air-Cooled	10.2	15	210 lbs.


Optional: Cubelet-Ice making conversion kit

© **HOSHIZAKI AMERICA, INC.**


We reserve the right to change specifications without notice.

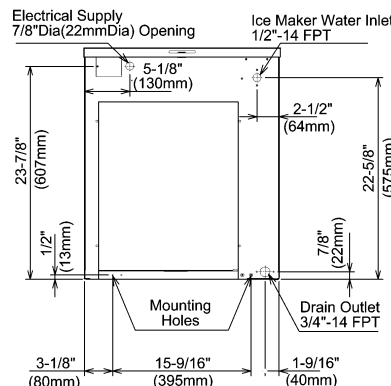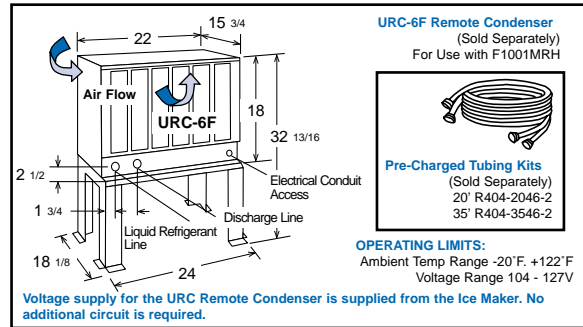


AIR-COOLED UNIT

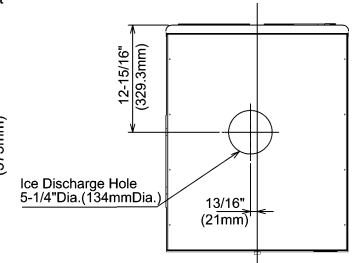


ICE DROP ZONE

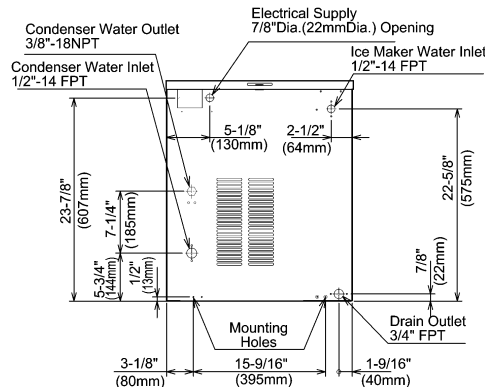


WATER-COOLED UNIT



SIDE VIEW

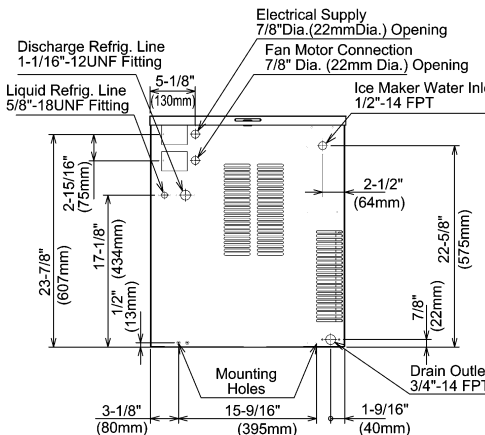

REMOTE AIR-COOLED UNIT



FRONT VIEW