


Hoshizaki Series


KM1300M_H
Item # 13034 05/04

KM-1300M_H SERIES


MODULAR CRESCENT ICE CUBER




B-500



B-700



B-800



B-900



KM-1300MAH Cuber
Shown on Optional
B-900 Bin

KM-1300MAH
Air-Cooled
KM-1300MWH
Water-Cooled
KM-1300MRH
Air-Cooled Remote

ICEMAKER DIMENSION

Width x Depth x Height

KM-1300M_H
30 x 27³/₈ x 41¹/₂"

DIMENSION BY BIN SIZE

Width x Depth x Height

B-500
30 x 32¹/₂ x 87¹/₂"

B-700
44 x 32¹/₂ x 87¹/₂"

B-800
48 x 32¹/₂ x 87¹/₂"

B-900
52 x 32¹/₂ x 87¹/₂"

- Durable stainless steel exterior

- CycleSaver® design



- EverCheck® alert system



- Up to 1322 lbs. of ice production per 24 hours

- Individual crescent cube

- Stainless steel evaporator

- Removable air filters
(Air-Cooled model only.)



Reliability is a beautiful thing™

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

1-800-438-6087


FAX 1-800-345-1325

TEL 770-487-2331

www.hoshizaki.com

CRESCENT ICE CUBER SLIM-LINE MODULAR

- KM-1300MAH** (AIR-COOLED)
- KM-1300MWH** (WATER-COOLED)
- KM-1300MRH** (AIR-COOLED REMOTE)



■ Up to 1322 lbs. of ice production per 24 hours



WARRANTY THREE YEAR - Parts & labor on entire machine. FIVE YEAR - Parts & Labor on : Evaporator FIVE YEAR - Parts on: Compressor, Air-Cooled Condenser Coil.	STAINLESS STEEL INTERNAL EVAPORATOR	SERVICE Panels easily removed and all components accessible for service. Removable/cleanable air filters.
	R-404 REFRIGERANT	

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact Factory for Warranty in other Countries.

OPTIONAL STORAGE BINS B-500 - 500 lb. Application Capacity (360 lb. ARI-Rated Capacity Bin) B-700 - 700 lb. Application Capacity (550 lb. ARI-Rated Capacity Bin) B-800 - 800 lb. Application Capacity (600 lb. ARI-Rated Capacity Bin) B-900 - 900 lb. Application Capacity (660 lb. ARI-Rated Capacity Bin) B-1200 - 1200 lb. Application Capacity B-1500 - 1500 lb. Application Capacity		ELECTRICAL & PLUMBING 208-230/60/1 (3 wire with dedicated neutral for 115V) 20 amp Max Fuse/HACR Breaker Size 1/2" OD copper or equivalent independent potable water supply 3/4" independent drain connection
OPERATING LIMITS Ambient Temp Range 45 - 100°F Water Temp Range 45 - 90°F Voltage Range 187-253V Water Pressure 10 - 113 psig		



AIR - COOLED			
Water Temp ° F.	50°	70°	90°
Air Temp ° F.	70°	1289	1222
	80°	1238	1133
	90°	1222	1059

WATER - COOLED			
Water Temp ° F.	50°	70°	90°
Air Temp ° F.	70°	1291	1271
	80°	1276	1244
	90°	1271	1222


AIR - COOLED REMOTE			
Water Temp ° F.	50°	70°	90°
Air Temp ° F.	70°	1322	1281
	80°	1291	1228
	90°	1281	1183

UTILITY CONSUMPTION					
Model Number	Ice Production Per Cycle		KWH per 100 lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal per 100 lbs.
	Lbs.	Cubes			
KM-1300MAH	28.6	1440	6.0	32.3	NA
KM-1300MWH	28.6	1440	4.1	30.6	76
KM-1300MRH	28.6	1440	5.3	32.0	NA


SPECIFICATIONS				
Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-1300MAH	Air-Cooled	13.2	20	322 lbs.
KM-1300MWH	Water-Cooled	11.5	20	332 lbs.
KM-1300MRH	A-C Remote	13.5	20	332 lbs.

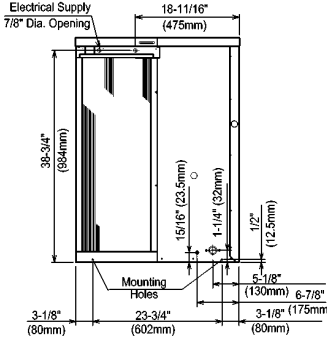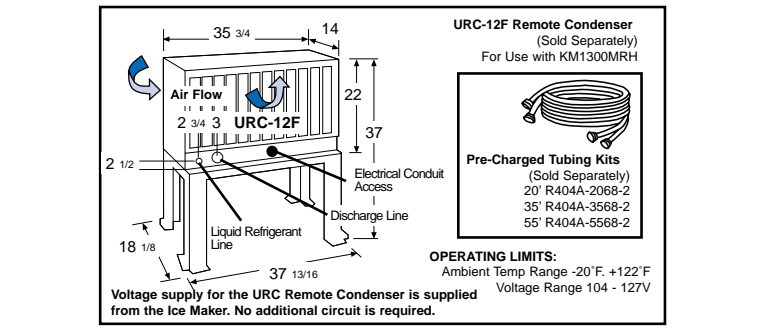




AIR-COOLED UNIT

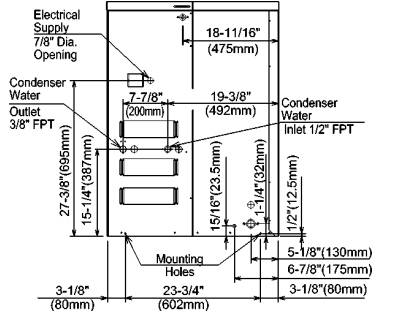

WATER-COOLED UNIT



REMOTE AIR-COOLED UNIT

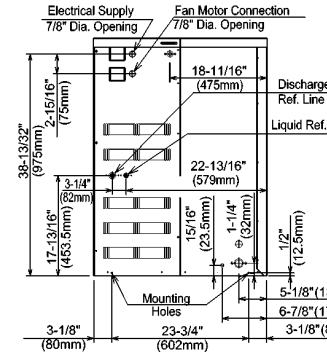

ICE DROP ZONE