

HOSHIZAKI

---AM-150BAF/BWF
Item # 13149 04/04


AM-150BAF/BWF

SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN



AM-150BAF
Air-Cooled
AM-150BWF
Water-Cooled

AM-150BAF



AM-150BAF

ICEMAKER DIMENSION

Width x Depth x Height

AM-150B_F

27 11/16 X 27 15/16 X 39"

*With 6" Legs

- Durable stainless steel exterior
- Undercounter design is less than 34 inches tall (Excluding legs)
- Up to 150 lbs. of ice production per 24 hours
- 88 lbs. of built-in storage capacity
- Easily disassembled water circuit for easy cleaning
- Front in, front out airflow (Air-Cooled only)
- Fewer moving parts for longer life
- Drop down door



Open cell evaporator



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com




Reliability is a beautiful thing™

SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

AM-150BAF (AIR-COOLED)

AM-150BWF (WATER-COOLED)




- Up to 150 lbs. of ice production per 24 hours
- 88 lbs. of built-in storage capacity



WARRANTY	
THREE YEAR - Parts & Labor on entire machine	
FIVE YEAR - Parts on compressor, and air cooled condenser coil	
FIVE YEAR - Parts on evaporator	
Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact Factory for Warranty in other Countries.	
STORAGE BINS	ELECTRICAL & PLUMBING
Up to 88 lb. Capacity Built-in Bin	115/60/1 15 amp Max Fuse 1/2" OD copper or equivalent independent potable water supply 3/4" independent drain connection 1/2" FPT Water Inlet
OPERATING LIMITS	
Ambient Temp Range 50 - 100°F	
Water Temp Range 41 - 90°F	
Voltage Range 104 - 127V	
Water Pressure 7 - 113 psig	
R-404A REFRIGERANT	

AIR - COOLED & WATER - COOLED					
Water Temp ° F. - 50°		150 Lbs.			
Air Temp ° F. - 70°					
UTILITY CONSUMPTION (Air 70F/Water 50°F)					
Model Number	Ice Production Per Cycle		KWH per 100 lbs.	Potable Water Gallons per 100 lbs.	Condenser Water Gallons per 100 lbs.
	Lbs.	Cubes			
AM-150BAF	1.87	60	10.6	31	NA
AM-150BWF	1.78	60	9.0	31	92
SPECIFICATIONS					
Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight	
AM-150BAF	Air-Cooled	8.8	NA	190 lbs.	
AM-150BWF	Water-Cooled	7.0	NA	192 lbs.	

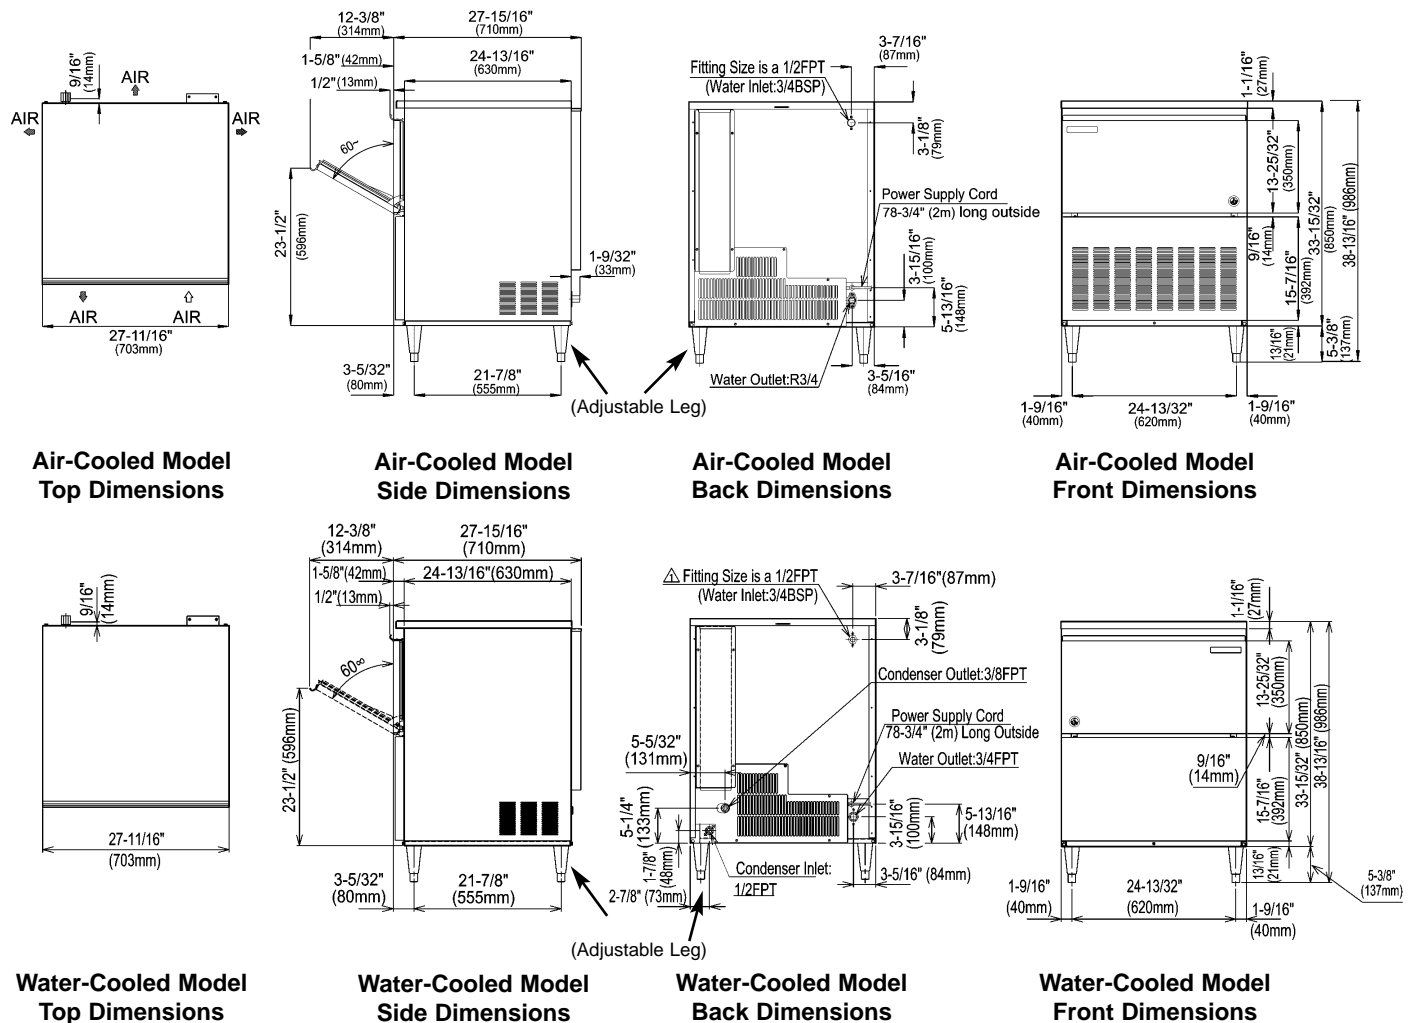

We reserve the right to change specifications without notice.

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.